


INSTALLATION DETAIL

ROUGH OPENING:-

Door Dimensions will be exactly your door size with a frame.
Recommended rough opening is between 3/4" (19mm) – 1" (25mm) larger than the Door width and height.
Ensure that the rough opening is plumb, level and square, and the walls in the opening are not twisted.

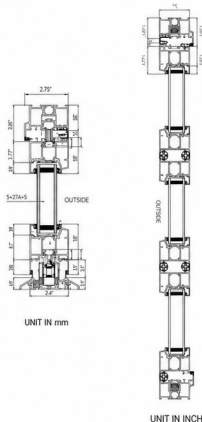

TITLE 24


	PbSolutions Fenestration Co. CtC
	Heat-Old Wood Frame Single-Pane Window
PRODUCT PERFORMANCE	
U-Value (SI 0.3-0.4)	0.29
Solar Heat Gain Coefficient	0.27
ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	0.51
Air Leakage (SI 0.3-0.4)	0.03

GLASS DETAILS

- DOUBLE TEMPERED GLASS
- EACH PANE 6MM GLASS
- E GLASS 100% BLOCK UV
- FILLED WITH ARGON GAS
- 5mm GLASS PANE + 27mm ARGON GAS+ 5MM GLASS PANE



BOTTOM TRACK DETAIL



PROJECT

DOOR TYPE

75 Series Bifold Doors Specification

Notes

1. All dimensions are in ft & inches
2. All dimensions are to be checked on site.
3. Any discrepancy between the architectural drawing and other drawings relevant for construction should be notified before commencement.